




P. C. B. LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 10mΩ max

■ WAFER

- Material: Base, LCP UL94V-0
- Contact, Brass Tin-plated

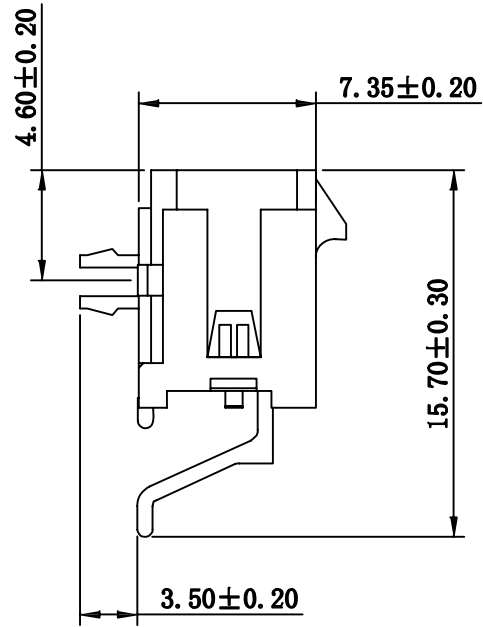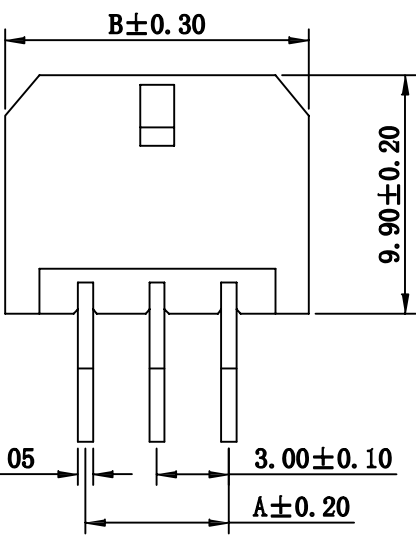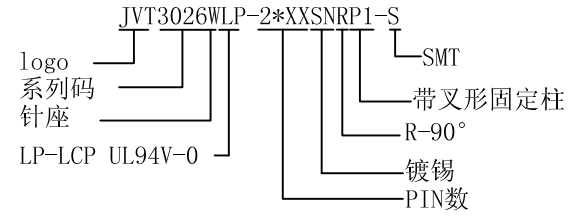

| Poles | DIM (mm) |       |
|-------|----------|-------|
|       | A        | B     |
| 2*1   | ---      | 6.65  |
| 2*2   | 3.00     | 9.65  |
| 2*3   | 6.00     | 12.65 |
| 2*4   | 9.00     | 15.65 |
| 2*5   | 12.00    | 18.65 |
| 2*6   | 15.00    | 21.65 |
| 2*7   | 18.00    | 24.65 |
| 2*8   | 21.00    | 27.65 |
| 2*9   | 24.00    | 30.65 |
| 2*10  | 27.00    | 33.65 |
| 2*11  | 30.00    | 36.65 |
| 2*12  | 33.00    | 39.65 |

| GENERAL TOLERANCE |       |
|-------------------|-------|
| 0                 | ±0.35 |
| .0                | ±0.30 |
| .00               | ±0.20 |
| .000              | ±0.10 |

**乔业电子有限公司**  
 CHYAO YEE CONNECTORS CO., L TD  
 版本: \_\_\_\_\_ 变更内容: \_\_\_\_\_ 日期: \_\_\_\_\_ 单位: mm 比例: 1:1 日期: 20150408

|    |     |     |    |                             |    |   |
|----|-----|-----|----|-----------------------------|----|---|
| 核准 | 审核  | 绘图  | 品名 | MOLEX3.0mm 双排 WAFER 90° SMT |    |   |
|    | 陈宁亮 | 李勇军 | 料号 | JVT3026WLP-2*XXSNRP1-S      |    |   |
|    |     |     | 图名 | 011                         | 版本 | A |